




MUROX CI PREFABRICATED PANEL

2-H FIRE RESISTANCE

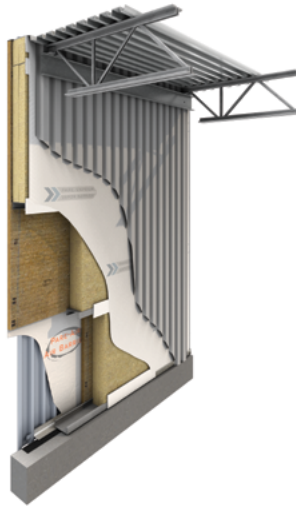

DESCRIPTION

Prefabricated wall panel consisting of a steel structural core with insulated cavity, exterior RSI-1.34 (R-7.6) continuous insulation and prepainted interior and exterior steel cladding. Integrated in the panels, the structural columns are composed of steel C channels up to 304.8 mm (12 in.) of depth. The air/water and vapor barrier membranes are shop-installed and sealing between panels is done on site. The effective thermal resistance value of the wall assembly is RSI-5.14 (R-29.2). Installation can be performed any time of year.

Components

- M-156R or M-2297 prepainted exterior steel cladding (see the Metal Cladding brochure). Refer to the Murox Technical Manual for other exterior finish options.
- Air barrier, non-woven type 1, air penetration resistance: $< 0.01 \text{ L}/(\text{s}\cdot\text{m}^2)$ at 75 Pa (0.004 cfm/ft.² at 1.57 psf).
- 50 mm (2 in.) exterior continuous rigid mineral insulation boards with a thermal resistance of RSI-1.34 (R-7.6).
- Structural steel framed panels.
- 203 mm (8 in.) friction fit mineral insulation batts with a thermal resistance of RSI-5.92 (R-33.6).
- Vapor barrier, polypropylene type 1, permeability: $1.15 \text{ ng}/\text{Pa}\cdot\text{s}\cdot\text{m}^2$ (0.02 perm).
- M-156R or M-2297 prepainted interior steel cladding (see the Metal Cladding brochure).

Versatile use

- Industrial, commercial and institutional buildings.
- New construction.
- Building expansion.
- Buildings where exterior walls are required by codes to have at most a 2-h fire-resistance rating.
- Buildings where non-combustible construction is required.

Restrictions

Refrigerated and agri-food buildings with food safety standards.
Contact your Canam representative for any question regarding restrictions and options available for your project.

Installation

Erector skills: According to the nature/extent of work required for the project, only a steel erector with a solid experience in assembling steel structures and similar products should be selected for the installation. The erector must meet all requirements, quality standards and installation methods established by Canam.



Technical data

Standard test methods:

- ASTM C1363 — Standard Test Method for Thermal Performance of Building Materials and Envelope Assemblies by Means of a Hot Box Apparatus
- CAN/ULC-S742 — Standard for air barrier assemblies – Specification
- ASTM E90-09 (2016) — Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements
- CAN/ULC-S101 — Standard methods of fire endurance tests of building construction and materials

The Murox CI - 2-h fire-resistance panel meets industry criteria to be considered as a pressure-equalized rainscreen wall with continuous insulation.

Table of physical characteristics

Characteristics	Test method	Result
Effective thermal resistance	ASTM C1363	RSI-5.14 m ² K/W (R-29.2 h-ft. ² -F/Btu)
Air leakage	CAN/ULC-S742	Classed A1 (S1000/H20)
Sound transmission class	ASTM E90-09 (2016)	STC 48, OITC 36
Fire resistance rating	CAN/ULC-S101	2 h with FEO factor (ULC Design BXUVC.W025)

Product data

Average weight	48.82 kg/m ² (10 lb./ft. ²)
Panel dimensions	Maximum width of 3 m (10 ft.), maximum height of 13.6 m (44.5 ft.)
Column sizes	203 to 304.8 mm (8 to 12 in.)
Transportation	Delivery by standard truck
Ventilated Thermal Panel (VTP)	Cannot be used with a Murox VTP solar collector

Contribution to LEED certification

The Murox CI - 2-h fire-resistance prefabricated wall panel can contribute to obtaining the following LEED credits:

- EA (Energy and Atmosphere) Credit 1 for optimization of new or existing building energy performance
- MR (Materials and Resources) Credits 4.1 and 4.2 for content of recycled materials
- MR (Materials and Resources) Credits 5.1 and 5.2 for materials of local or regional origin

All Murox panels are manufactured at our plant in Saint-Gédéon-de-Beauce, Quebec.

For further information, contact your Canam representative.

Quality control

The Saint-Gédéon-de-Beauce plant is ISO 9001:2015, CWB, SJI, AISC and CISC certified.

A strict manufacturing quality control procedure is implemented in our plants, ensuring quality and consistency of the product through several points of strategic control.

For buildings erected by Canam, a certificate of compliance is issued upon completion of building assembly.

CSC and CSI MasterFormat™

13 34 19 – Fabricated Engineered Structures-Steel Building System.

Go to canam-construction.com for product information updates.